

They are designed to replace the lead-acid battery, which are available for drop-in replacement in the Club Car and EZ-GO etc. vehicles nicely.

- MODEL** B-LFP48-150GC
- VOLTAGE** 51.2V (Display voltage: 52.8V)
- NOMINAL CAPACITY** 156Ah
- CASE** METAL/FR
- BATTERY** Lithium-iron (LFP)
- COLOR** BLUE
- CYCLE LIFE** 3500 @80%DOD
- INTELLIGENCE** Multiple Microprocessors, State of Charge Gauge with Aging Compensation, Current Sensor, Fuse, CAN Bus



ELECTRICAL SPECIFICATIONS

Battery Types	Lithium-iron (LFP)
Rated Capacity	156Ah
Nominal Voltage	51.2V Display voltage: 52.8V
Operating Voltage Range	40V~57.6V Battery cell: 2.5V~3.65V
System Capacity	8.0 KWh
Battery Group Solution	3P16S A boxful
IP Protection Level	Battery system IP54
Cycle Life	> 3500 times 25°C, 05C charge, 1C discharge, DOD 70% (soc 0~100%)
Battery System Weight	76KG
Calendar Life	12 years 25°C, SOC 100%, EOL 80%


TEMPERATURE SPECIFICATIONS

Operating Temperature Range A Column Temperature	Charge	0°C~55°C
	Discharge	-20°C +55°C

PHYSICAL SPECIFICATIONS

Battery Pack Factory SOC	50%
Battery SOC Operating Range	0~100%
Insulation Requirements	≥20MΩ/1000VDC 25°C ± 5°C, RH50%
The Power Consumption Of The BMS	≤3W
SOC Theory Estimation Accuracy	±5%
Unit Voltage Acquisition Accuracy	±5mV Capture every single monomer
Temperature Acquisition Accuracy	±2°C 4 road
Current Acquisition Accuracy	≤ ± 0.5% FSR
Equalizing Current	≤ 100mA Passive equalization
Protect Function	Over-current protection, over-discard protection, over-discharge protection, high and low temperature protection, abnormal alarm function.



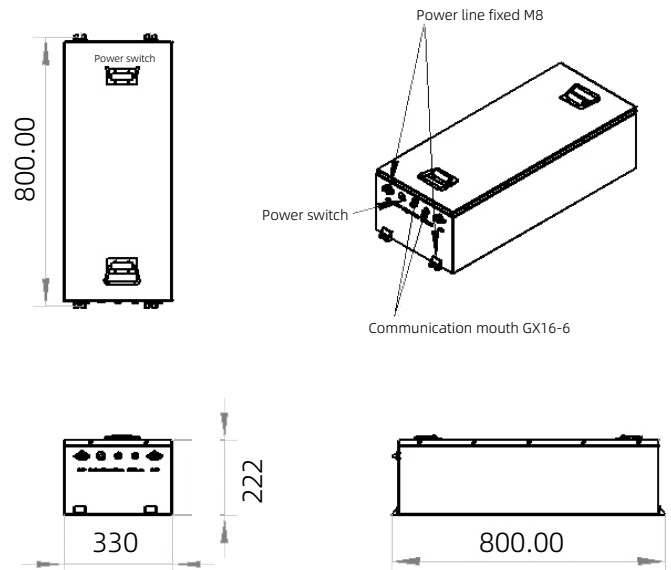




DIMENSIONAL SPECIFICATIONS



DISCHARGE SPECIFICATIONS

Maximum Continuous Charging Current	80A	10°C~45°C, 5% <SOC < 80%
Maximum Continuous Discharging Current	200A	5°C~50°C, SOC > 20%
Maximum Instantaneous Charging Current (10S)	150A	10°C~45°C, 5% <SOC < 80%
Maximum Instantaneous Discharging Current (10S)	400A	5°C~50°C, SOC > 20%
Standard Charging Current Is Recommended	< 40A	
Self-discharge Rate/Month (25°C, SOC100 %)	< 3%	

FIVE YEAR COST COMPARISON BETWEEN BSLBATT & LEAD ACID BATTERIES

	YEAR 1	YEAR 2	YEAR 3	YEAR 4	YEAR 5
 \$ Cost Of Battery	\$\$\$				
 Installation	\$				
 Maintenance					
 Maintenance					
 Maintenance					
 Battery Change					
Total					\$\$\$\$\$
 \$ Cost Of Battery	\$				
Installation	\$				
Maintenance		\$			
Maintenance			\$		
Maintenance				\$	
Maintenance					\$
Battery Change					\$
Total					\$\$\$\$\$



Do not mix with lead-acid batteries when recycling to 70% initial capacity

B-LFP48-150 LITHIUM-ION BATTERY
GOLF



STRUCTURAL DIFFERENCES IN THE BSLBATT GOLF CART SERIES

Each Cell Is Encased In Aluminum

- ✔ Provides dimensional stability

Steel Battery Bracket

- ✔ Provides vibration and shock resistance

External Heat Sink Keeps

- ✔ BMS cool by providing heat dissipation to outside

BMS Bolted To Heat Sink

- ✔ Reduces vibration and prevents accidental faults due to vibration and it extends battery life

Bolted Connections To BMS

- ✔ Provides stable mechanical and electrical connections

Positive And Negative BusBar



- ✔ Creates an exceptional current collector

IP54 Rated Casing

- ✔ Ensures water, dust and splash-resistance

TECHNICAL BSLBATT LITHIUM CURVE

ENVIRONMENT TEMPERATURE: 25°C DISCHARGE CURRENT: 0.5C/1C/3C/5C

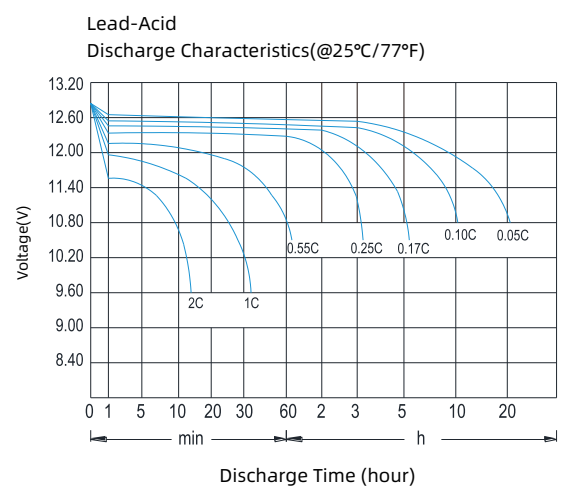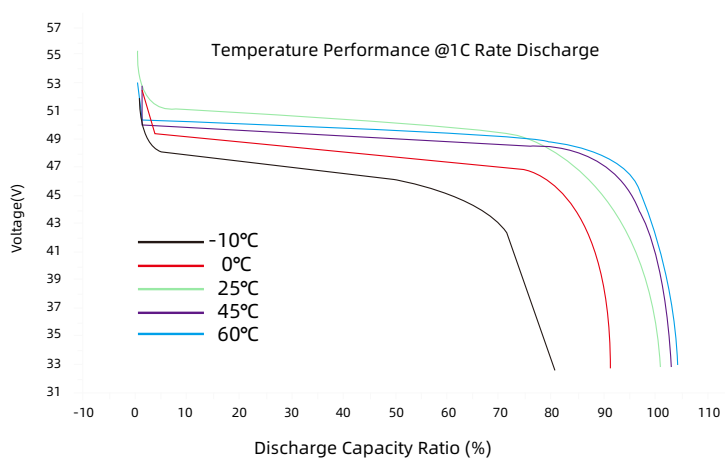

BSLBATT lithium battery has a longer constant stable curve during discharge.