

They are designed to replace the lead-acid battery, which are available for drop-in replacement in the Club Car and EZ-GO etc. vehicles nicely.

- MODEL** B-LFP36-100GC
- VOLTAGE** 38.4V (Display voltage: 39.6V)
- NOMINAL CAPACITY** 105Ah
- CASE** METAL/FR
- BATTERY** Lithium-iron (LFP)
- COLOR** BLUE
- CYCLE LIFE** 3500 @80%DOD
- INTELLIGENCE** Multiple Microprocessors, State of Charge Gauge with Aging Compensation, Current Sensor, Fuse, CAN Bus



ELECTRICAL SPECIFICATIONS

Battery Types	Lithium-iron (LFP)
Rated Capacity	105Ah
Nominal Voltage	38.4V Display voltage: 39.6V
Operating Voltage Range	30V~43.2V Battery cell: 2.5V~3.65V
System Capacity	3.994 KWh
Battery Group Solution	2P12S A boxful
IP Protection Level	Battery system IP54
Cycle Life	> 3500 times 25°C, 05C charge, 1C discharge, DOD 70% (soc 0~100%)
Battery System Weight	40KG
Calendar Life	12 years 25°C, SOC 100%, EOL 80%


TEMPERATURE SPECIFICATIONS

Operating Temperature Range A Column Temperature	Charge	0°C~55°C
	Discharge	-20°C~+55°C

PHYSICAL SPECIFICATIONS

Battery Pack Factory SOC	50%
Battery SOC Operating Range	0~100%
Insulation Requirements	≥20MΩ/1000VDC 25°C ± 5°C, RH50%
The Power Consumption Of The BMS	≤3W
SOC Theory Estimation Accuracy	±5%
Unit Voltage Acquisition Accuracy	±5mV Capture every single monomer
Temperature Acquisition Accuracy	±2°C 4 road
Current Acquisition Accuracy	≤ ± 0.5% FSR
Equalizing Current	≤ 100mA Passive equalization
Protect Function	Over-current protection, over-discharge protection, high and low temperature protection, abnormal alarm function.

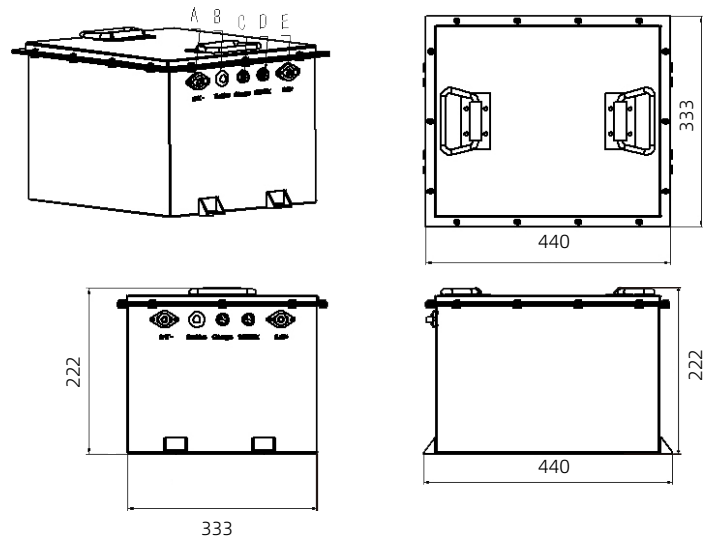

DIMENSIONAL SPECIFICATIONS



DISCHARGE SPECIFICATIONS

Maximum Continuous Charging Current	50A 10°C~45°C, 5% < SOC < 80%
Maximum Continuous Discharging Current	150A 5°C~50°C, SOC > 20%
Maximum Instantaneous Charging Current (10S)	100A 10°C~45°C, 5% < SOC < 80%
Maximum Instantaneous Discharging Current (10S)	250A 5°C~50°C, SOC > 20%
Standard Charging Current Is Recommended	< 30A
Self-discharge Rate/Month (25°C, SOC100%)	< 3%

FIVE YEAR COST COMPARISON BETWEEN BSLBATT & LEAD ACID BATTERIES

	YEAR 1	YEAR 2	YEAR 3	YEAR 4	YEAR 5
 \$ Cost Of Battery ✂ Installation ⚙ Maintenance ⚙ Maintenance ⚙ Maintenance 🔍 Battery Change	\$\$\$\$	\$			
Total					\$\$\$\$\$\$
	\$	\$	\$	\$	\$
Total					\$\$\$\$\$\$\$\$



Do not mix with lead-acid batteries when recycling to 70% initial capacity

GOLF

LITHIUM-ION
BATTERY

B-LFP36-100

BSLBATT
Best Solution Lithium Battery



STRUCTURAL DIFFERENCES IN THE BSLBATT GOLF CART SERIES

Each Cell Is Encased In Aluminum

- ✔ Provides dimensional stability

Steel Battery Bracket

- ✔ Provides vibration and shock resistance

External Heat Sink Keeps

- ✔ BMS cool by providing heat dissipation to outside

BMS Bolted To Heat Sink

- ✔ Reduces vibration and prevents accidental faults due to vibration and it extends battery life

Bolted Connections To BMS

- ✔ Provides stable mechanical and electrical connections

Positive And Negative BusBar

- ✔ Creates an exceptional current collector



IP54 Rated Casing

- ✔ Ensures water, dust and splash-resistance

TECHNICAL BSLBATT LITHIUM CURVE

ENVIRONMENT TEMPERATURE: 25°C

CHARGING CONDITION: 1C CC-CV to 3.65V, cutoff 0.05C @25°C;

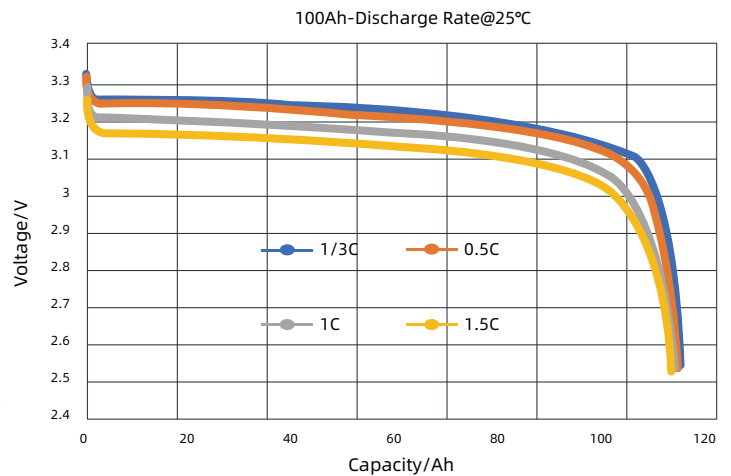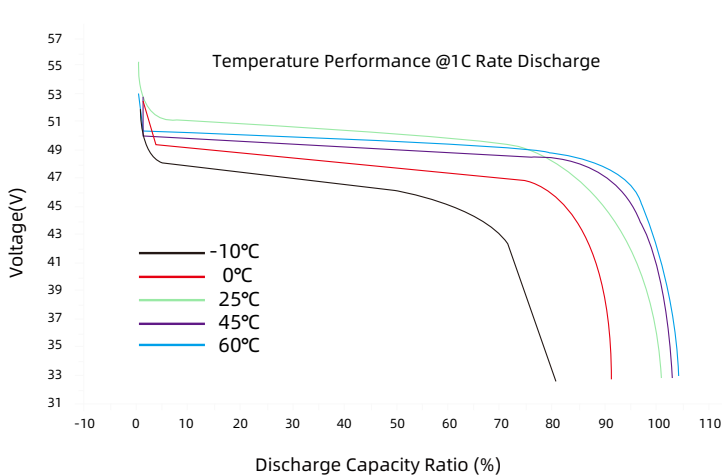

BSLBATT lithium battery has a longer constant stable curve during discharge.